



2cm厚磚：陽台、泳池高架、車道、門廳、梯廳地磚
低吸水率、高硬度、依石材裁切



華漢
HWAHAN

Th 2cm

Th 2cm



Th 2cm



Th 2cm



Th 2cm



Th 2cm



Th 2cm



義大利

Gabbro 蓋柏



R11 60 x 120 cm



R11 45 x 90 cm



R11 60x 60 cm




HEAVY TRAFFIC
CALPESTIO PESANTE

HEAVY COMMERCIAL AREAS (malls, airports, places of worship, schools, museums, squares, hospitals, etc.)

Gabbro 蓋柏



Gypsum 白灰色

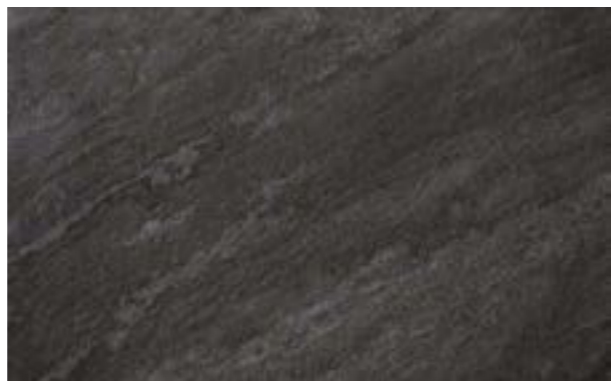

Coke 煤炭黑



Pearl 珍珠灰



Grey 灰色



Earth 大地色

Colour-Shading . Stonalizzazione

	V1	Uniform appearance Aspetto uniforme Gleichmäßiges Erscheinungsbild Rusko jednolite Цілісний відтінок
	V2	Slight variation Variazione minima Variazione minima Leichte Abweichung Незначна різноманітність
	V3	Moderate variation Variazione moderata Moderate Variation Mäßige Abweichung Незначна різноманітність
	V4	Substantial variation Variazione sostanziale Substantial variation Grundlegende Abweichung Висока різноманітність

GYPSUM PEARL GREY

Driftwood 漂流木



R11/B 50 x 100 cm



grey-brown 棕灰色

Oak 橡木



R11/B 50 x 100 cm



natural oak 天然橡木色



anthracite oak 無煙煤橡木

Quarzit 石英石



R11/B 60 x 60 cm



Sandbeige 沙灰色



Basaltgrey 玄武灰



Quartzgrey 石英灰

施工建議:




乾式



濕式



高架

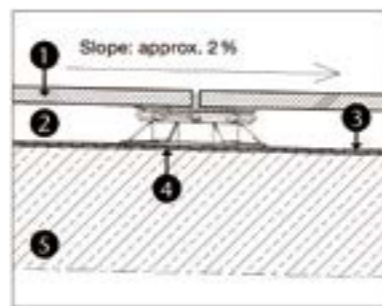

1. 鋪設2cm厚磁磚。
2. 高架墊。
3. 分離層防護墊。
4. 密封防水層(根據DIN 18195)。
5. 基底層。

	TECHNICAL FEATURES T	est method R	equirements for nominal size N T	extured 20mm
Structural features	Water absorption level (in% by mass)	ISO 10545-3	EB≤ 0,5% Individual max 0,6%	≤0.1%
Bulk mechanical features	Breaking strength	ISO 10545-4	S≥1300N	S ≥10000 N
	Modulus of Rupture		R≥35N/mm2	R ≥45 N/mm2
Safety features	Barefoot Ramp Test	DIN 51097	Declare a value	A+B+C
		DIN 51130	Declare a value	R11
		UNE-ENV 12633 BS 7976-2002	Declare a value	Class3 PTV >36Dry PTV >36Wet
Surface mechanical features	Mohs hardness E	N 101(1)	≥6(UGL) M	OHS 8

華漢實業有限公司
 地址:台北市中山區民生東路三段29號9樓
 Tel : (02)2506-7979 Fax : (02)2506-7262
 Website: <http://www.hwahanc.com.tw/>
 Email : hhc@hwahanc.com

